


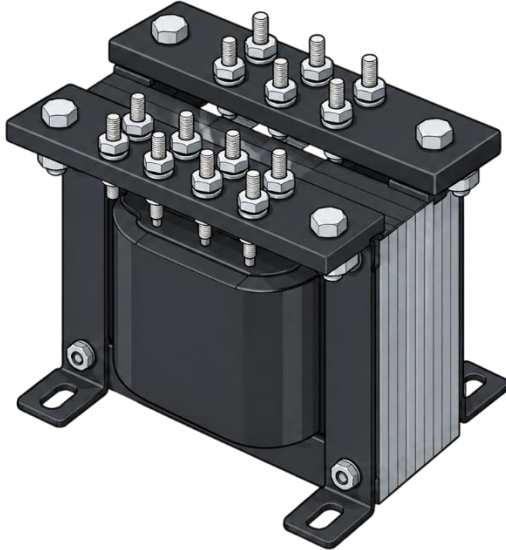

- 5 kVA
- 2500 Vrms High Electrical Isolation and Dielectric Strength
- Multi-tap Flexible Voltage, Supporting 104 V, 110 V, 120 V, 208 V, 220 V, and 240 V for both input and output
- Electrostatic shield

Specifications

Item	Specification
Rated Capacity	5 kVA
Dielectric Strength	2500 Vrms
Insulation Class	Class B (130°C)
Electrostatic Shielding	Solid copper foil shield (connected to ground terminal)
Terminal Type	2-eighths (1/4") US standard terminal
Primary Voltage	Parallel: 104 V / 110 V / 120 V
	Series: 208 V / 220 V / 240 V
Secondary Voltage	Parallel: 104 V / 110 V / 120 V
	Series: 208 V / 220 V / 240 V
Maximum Current	Parallel output: 46 A
	Series: 23 A
Dimensions (L x W x H)	270 x 190 x 190 ± 5 mm
Weight	40 ± 3 kg

Note: Specifications are subject to change without notice.